


SMD Ceramic Resonators


ZTACC Series

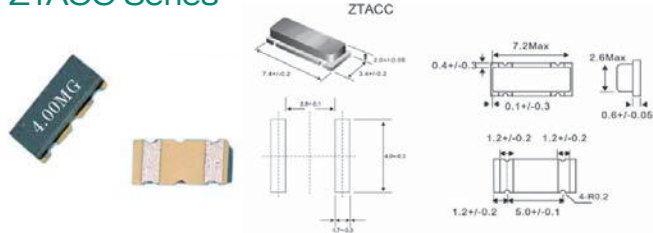

Technical parameters	ZTACC
Frequency tolerance	±0,5%
Temperature range	-20°C up to +80°C
Voltage sustaining capability	30pF
How to order	ZTACC 2,00 MG

Part No.	Ord.No.
o ZTACC2,00MG 2MHz	68770
o ZTACC3,58MG 3,58MHz	68771
o ZTACC4,00MG 4MHz	51980
o ZTACC6,00MG 6MHz	68800


ZTACS Series

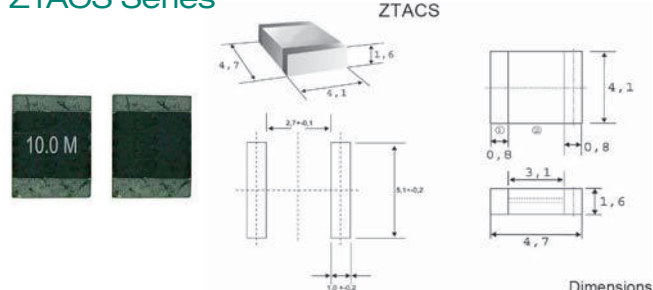

Technical parameters	ZTACS
Frequency tolerance	±0,5%
Temperature range	-20°C up to +80°C
How to order	ZTACS 12,00 MT

Part No.	Ord.No.
o ZTACS8,00MT 8MHz	68801
o ZTACS10,00MT 10MHz	68802
o ZTACS12,00MT 12MHz	68803


ZTTCC Series

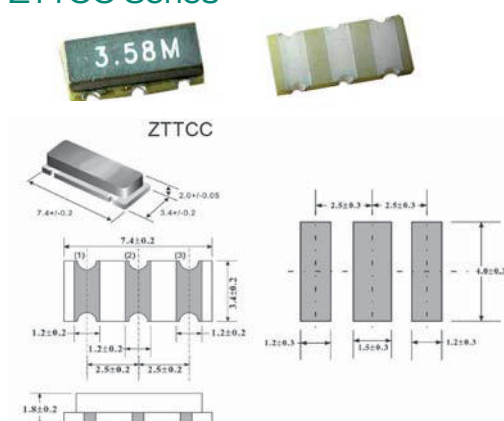

Technical parameters	ZTTCC
Frequency tolerance	±0,5%
Temperature range	-20°C up to +80°C
Load capacitance	22pF
How to order	ZTTCC 2,00 MG

Part No.	Ord.No.
o ZTTCC2,00MG 2MHz	68772
o ZTTCC3,58MG 3,58MHz	68773
o ZTTCC4,00MG 4MHz	68774
o ZTTCC6,00MG 6MHz	68804


ZTTCS Series

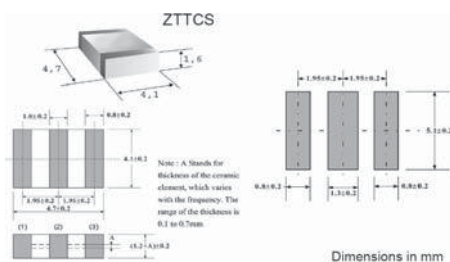

Technical parameters	ZTTCS
Frequency tolerance	±0,5%
Temperature range	-20°C up to +80°C
How to order	ZTTCS 12,00 MT

Part No.	Ord.No.
o ZTTCS8,00MT 8MHz	68805
o ZTTCS10,00MT 10MHz	68806
o ZTTCS12,00MT 12MHz	68807

KR Series

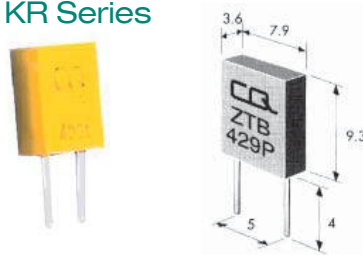

Technical parameters	KR
Frequency tolerance	±0,3%
Temperature range	-20°C up to +80°C
How to order	KR 429 kHz

Part No.	Ord.No.
s KR 429 KHZ (CSB429P)	30181
s KR 455 KHZ (CSB455)	30182
s KR 485 KHZ (CSB485)	30183
o KR 500 KHZ (RS500KHZ)	30184

More information needed?

electroniconline

www.soselectronic.com