


Toroidal Transformers

Standard Toroidal Transformers



Basic types suitable for industrial purposes and dry environments either. Transformer is snaped by thrust metal ring and two rubber rings. One of the rubber rings is used as the bearing under the transformer and ensures the separation from a surface mounted with transformer. The second rubber ring is inserted between thrust metal ring and transformer and is screwed altogether with a screw, which is not supplied in a delivery.

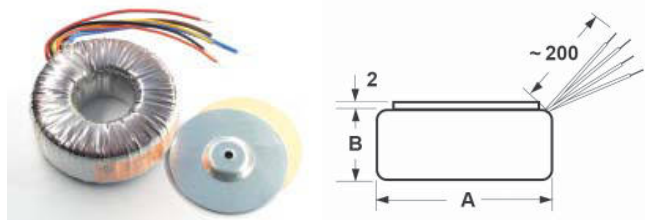

15 VA

Part No.	Power [W]	U _{sec} [V]	A [mm]	B [mm]	Weight [kg]
55 100-P1S2	15VA	2x12V	62	32	0,31
55 101-P1S2	15VA	2x15V	62	32	0,31
55 103-P1S2	15VA	2x25V	62	32	0,31

Part No.	Ord.No.
o 55 100-P1S2	75665
o 55 101-P1S2	75666
o 55 103-P1S2	75667

30 VA

Part No.	Power [W]	U _{sec} [V]	A [mm]	B [mm]	Weight [kg]
55 110-P1S2	30VA	2x12V	74	34	0,44
55 111-P1S2	30VA	2x15V	74	34	0,44
55 112-P1S2	30VA	2x18V	74	34	0,44
55 113-P1S2	30VA	2x25V	74	34	0,44

Part No.	Ord.No.
o 55 110-P1S2	75668
o 55 111-P1S2	75669
o 55 112-P1S2	75670
o 55 113-P1S2	75671

50 VA

Part No.	Power [W]	U _{sec} [V]	A [mm]	B [mm]	Weight [kg]
55 120-P1S2	50VA	2x12V	84	34	0,63
55 121-P1S2	50VA	2x15V	84	34	0,63
55 122-P1S2	50VA	2x18V	84	34	0,63
55 123-P1S2	50VA	2x25V	84	34	0,63
55 129-P1S2	50VA	2x55V	84	34	0,63

Part No.	Ord.No.
o 55 120-P1S2	75672
o 55 121-P1S2	75673
o 55 122-P1S2	75674
o 55 123-P1S2	75675
o 55 129-P1S2	75676

80 VA

Part No.	Power [W]	U _{sec} [V]	A [mm]	B [mm]	Weight [kg]
55 130-P1S2	80VA	2x12V	95	36	0,87
55 131-P1S2	80VA	2x15V	95	36	0,87
55 132-P1S2	80VA	2x18V	95	36	0,87
55 133-P1S2	80VA	2x25V	95	36	0,87
55 139-P1S2	80VA	2x55V	95	36	0,87

Part No.	Ord.No.
s 55 130-P1S2	75677
s 55 131-P1S2	75678
s 55 132-P1S2	75679
o 55 133-P1S2	75680
o 55 139-P1S2	75681

120 VA

Part No.	Power [W]	U _{sec} [V]	A [mm]	B [mm]	Weight [kg]
55 140-P1S2	120VA	2x12V	96	47	1,20
55 141-P1S2	120VA	2x15V	96	47	1,20
55 142-P1S2	120VA	2x18V	96	47	1,20
55 143-P1S2	120VA	2x25V	96	47	1,20
55 149-P1S2	120VA	2x55V	96	47	1,20

Part No.	Ord.No.
s 55 140-P1S2	75682
o 55 141-P1S2	75683
o 55 142-P1S2	75684
s 55 143-P1S2	75685
o 55 149-P1S2	75686

160 VA

Part No.	Power [W]	U _{sec} [V]	A [mm]	B [mm]	Weight [kg]
55 150-P1S2	160VA	2x12V	110	46	1,50
55 151-P1S2	160VA	2x15V	110	46	1,50
55 152-P1S2	160VA	2x18V	110	46	1,50
55 153-P1S2	160VA	2x25V	110	46	1,50
55 154-P1S2	160VA	2x30V	110	46	1,50
55 159-P1S2	160VA	2x55V	110	46	1,50

Part No.	Ord.No.
s 55 150-P1S2	75687
o 55 151-P1S2	75688
o 55 152-P1S2	75689
s 55 153-P1S2	75690
s 55 154-P1S2	75691
o 55 159-P1S2	75692

225 VA

Part No.	Power [W]	U _{sec} [V]	A [mm]	B [mm]	Weight [kg]
55 160-P1S2	225VA	2x12V	118	50	1,90
55 161-P1S2	225VA	2x15V	118	50	1,90
55 162-P1S2	225VA	2x18V	118	50	1,90
55 163-P1S2	225VA	2x25V	118	50	1,90
55 164-P1S2	225VA	2x30V	118	50	1,90
55 169-P1S2	225VA	2x55V	118	50	1,90

Part No.	Ord.No.
s 55 160-P1S2	75693
o 55 161-P1S2	75694
o 55 162-P1S2	75695
s 55 163-P1S2	75696
s 55 164-P1S2	75697
o 55 169-P1S2	75698

300 VA

Part No.	Power [W]	U _{sec} [V]	A [mm]	B [mm]	Weight [kg]
55 173-P1S2	300VA	2x25V	118	60	2,40
55 174-P1S2	300VA	2x30V	118	60	2,40
55 175-P1S2	300VA	2x35V	118	60	2,40
55 179-P1S2	300VA	2x55V	118	60	2,40

Part No.	Ord.No.
s 55 173-P1S2	75699
s 55 174-P1S2	75700
s 55 175-P1S2	75701
o 55 179-P1S2	75702