




- angled contacts (without marking straight)
- height in mm (plastic part)
- PSO - precise "breakable" header
- ST - standard header
- SO - "breakable" header
- G - gold-plated contacts
- Z - tin-contacts
- number of pins (05 - 5 pins)
- 1- single row
- 2- double-row




2,54



	Part No.	Ord.No.	A[mm]	B[mm]
S	NSL 25-2 W	4939	5,08	2,54
S	NSL 25-3 W	4940	7,62	5,08
S	NSL 25-4 W	4941	10,16	7,62
S	NSL 25-5 W	5746	12,7	10,16
S	NSL 25-6 W	43991	15,24	12,7
S	NSL 25-8 W	5685	20,32	17,78
S	NSL 25-10 W	5686	25,4	22,86




	Part No.	Ord.No.	A[mm]	B[mm]
S	NSG 25-2	4934	2,54	5,6
S	NSG 25-3	4935	5,08	8,1
S	NSG 25-4	4936	7,62	10,7
S	NSG 25-5	5256	10,16	13,2
S	NSG 25-6	8641	12,7	15,74
S	NSG 25-8	5680	17,78	20,8
S	NSG 25-10	5681	22,86	25,9



Part No.	Ord.No.
S NSK 25-0	4937

Part No.	Ord.No.
S P 35002	6174
S P 35003	6175
S P 35004	6176
S P 35005	6177
S P 35006	6178
S P 350010	6180

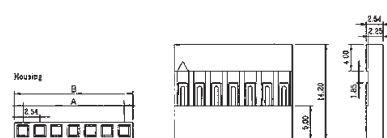

	Part No.	Ord.No.	A[mm]	B[mm]
S	CG2	42648	2,54	5,08
S	CG3	43075	5,08	7,62
S	CG4	43076	7,62	10,16
S	CG5	43077	10,16	12,7