


Lighting Connectors



222-412

222-413

222-415

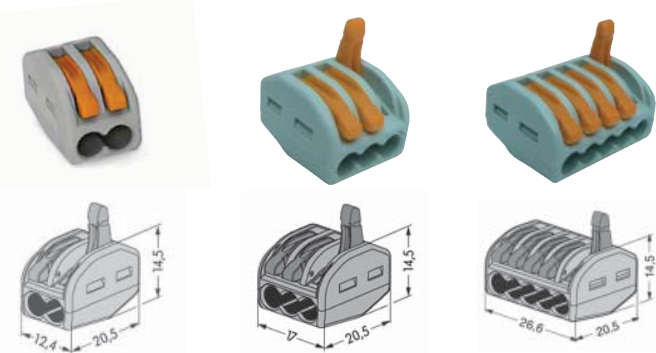


Technical Parameters	222-412	222-413	222-415
Number of Wires	2	3	5
Stranded Wire	0,08-4mm ²	0,08-4mm ²	0,08-4mm ²
Solid Wire	0,08-2,5mm ²	0,08-2,5mm ²	0,08-2,5mm ²
Stripping Length	10mm	10mm	10mm
Maximum Voltage	400V	400V	400V
Maximum Current	32A	32A	32A
Maximum Temperature	85°C	85°C	85°C
Colour	grey	grey	grey

Part No.	Ord. No.
S 222-412	62793
S 222-413	45933
S 222-415	52689

224-101
224-104


224-112

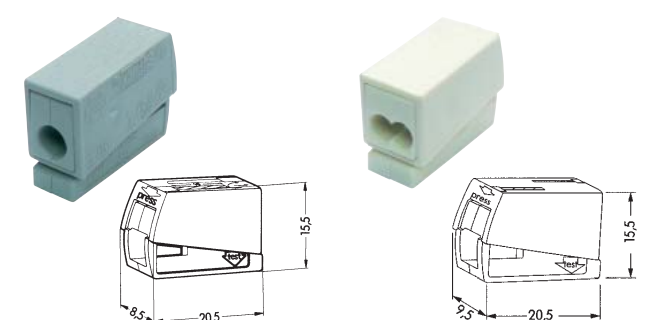

Technical Parameters	224-101 / 224-104	224-112
Number of Wires	1	2
Stranded Wire	0,5-2,5mm ²	0,5-2,5mm ²
Solid Wire	1-2,5mm ²	2 x 1-2,5mm ²
Stripping Length	11mm	11mm
Maximum Voltage	400V	400V
Maximum Current	24A	24A
Maximum Temperature	105°C	105°C
Colour	grey	white

Part No.	Ord. No.
O 224-101	41789
S 224-112	41791


224-201

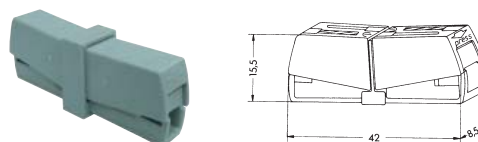

Technical Parameters	224-201
Number of Wires	1
Stranded Wire	2 x 0,5-2,5mm ²
Solid Wire	-
Stripping Length	11mm
Maximum Voltage	400V
Maximum Current	24A
Maximum Temperature	105°C
Colour	grey

Part No.	Ord. No.
O 224-201	41792

Push-Wire Connectors for Junction Boxes




Push-wire connector for junction boxes for quick and safe installations
Strip insulation: Strip solid conductor 10-13 mm / 0.45 in
Push-wire connection: Insert stripped solid conductor FULLY
Push-wire connection: Removing: Hold wire to be removed and twist alternately left and right while pulling the connector
Testing - via separate test slot



273-112
273-252

273-100
273-153

273-104
273-253

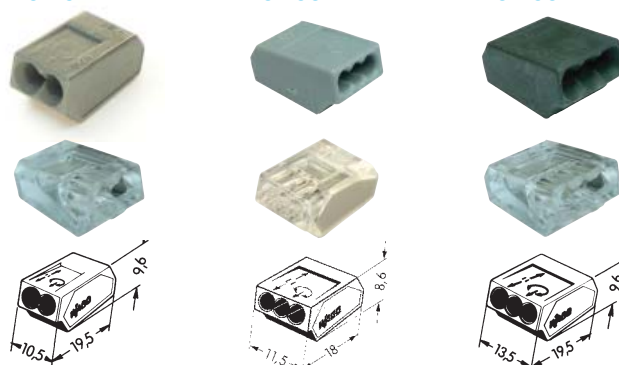

Technical Parameters	273-112/ 273-252	273-100/ 273-153	273-104/ 273-253
Number of Wires	2	3	3
Wire Section	1-2,5mm ²	0,75-1,5mm ²	1-2,5mm ²
Stripping Length	13mm	13mm	13mm
Maximum Voltage	400V	400V	400V
Maximum Current	24A	18A	24A
Maximum Temperature	105°C	105°C	105°C
Colour	dark grey/ water clear	grey/ water clear	dark grey/ water clear

Part No.	Ord. No.	Description
S 273-100	42431	grey 1,5mm ² 3P
S 273-153	48423	plexi 1,5mm ² 3P
S 273-112	42122	grey 2,5mm ² 2P
S 273-252	42125	plexi 2,5mm ² 2P
S 273-104	42119	grey 2,5mm ² 3P
S 273-253	42126	plexi 2,5mm ² 3P