

VISATON Widerange Speakers

(continued)





FR 8/4
FR 8/8

8 cm (3.3") fullrange speaker with good bass reproduction, balanced frequency response and high efficiency. Especially suitable as built-in speaker for music reproduction and as driver for 100 V network column speakers.



Industry



| Technical Parameters | FR 8/4 / FR 8/8 |
|--------------------------|-----------------|
| Diameter | 86 mm |
| Depth | 37 mm |
| Rated Noise Power | 10 W |
| Short Term Maximum Power | 15 W |
| Impedance | 4 Ω / 8 Ω |
| Resonant Frequency | 150 Hz |
| Rated Frequency Range | 130-20000 Hz |
| Sensitivity | 86 dB |

| Part No. | Ord.No. |
|----------|---------|
| S FR 8/4 | 46341 |
| S FR 8/8 | 46342 |





FRS 8/4

8 cm (3.3") HiFi fullrange driver. Linear frequency response between 200 and 20000 Hz. Suitable for surround effect speakers, mini sub/sat systems. Due to the small size very suitable for model construction and as control speaker for electronic devices.



Industry

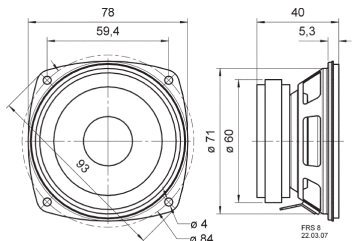

| Technical Parameters | FRS 8/4 |
|--------------------------|---------------|
| Diameter | 200 mm |
| Depth | 40 mm |
| Rated Noise Power | 30 W |
| Short Term Maximum Power | 50 W |
| Impedance | 4 Ω |
| Resonant Frequency | 130 Hz |
| Rated Frequency Range | 130-20000 Hz |
| Sensitivity | 82 dB (1W/1m) |

| Part No. | Ord.No. |
|-----------|---------|
| O FRS 8/4 | 46339 |





K 50/8

5 cm (2") miniature speaker with plastic diaphragm and metal basket. Thanks to its compact dimensions, suitable for signal output in machines and other equipment where space is at a premium.



Industry

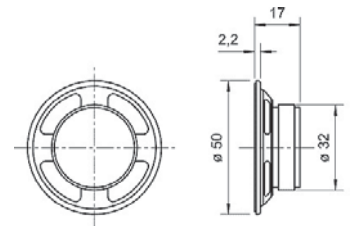

| Technical Parameters | K 50/8 |
|--------------------------|--------------|
| Diameter | 50 mm |
| Depth | 17 mm |
| Rated Noise Power | 2 W |
| Short Term Maximum Power | 3 W |
| Impedance | 8 Ω |
| Resonant Frequency | 350 Hz |
| Rated Frequency Range | 250-10000 Hz |
| Sensitivity | 83 dB |

| Part No. | Ord.No. |
|----------|---------|
| S K 50/8 | 46354 |





SC 5.9/8

Magnetically shielded oval fullrange driver with good efficiency and balanced frequency response with a clear highrange reproduction. Extremely small size due to a neodymium magnet system. Applicable as built-in speaker in TV's and PC's with very small mounting space.



Industry



| Technical Parameters | SC 5.9/8 |
|--------------------------|--------------|
| Dimensions | 90,5x50,5 mm |
| Depth | 41 mm |
| Rated Noise Power | 10 W |
| Short Term Maximum Power | 15 W |
| Impedance | 8 Ω |
| Resonant Frequency | 170 Hz |
| Rated Frequency Range | 130-20000 Hz |
| Sensitivity | 83 dB |

| Part No. | Ord.No. |
|------------|---------|
| S SC 5.9/8 | 46360 |